

ProfHold Sliding Doors (SD) USD 30.10.2023

Door hardware KIDE (Spain), ColdTech (Italy)



Thickness, mm, ft	Height, mm, ft	Width, mm, ft											
		800, 2'6"	1000, 3'2"	1200, 3'9"	1400, 4'5"	1600, 5'2"	1800, 5'9"	2000, 6'5"	2200, 7'2"	2400, 7'8"	2600, 8'5"	2800, 9'1"	3000, 9'8"
80, 0'2"	1800, 5'9"	628	678	712	823	1 155	1 200	1 234	1 351	1 408	1 499	1 513	1 543
	2000, 6'5"	645	699	734	852	1 184	1 231	1 266	1 389	1 448	1 515	1 561	1 592
	2200, 7'2"	663	719	756	880	1 214	1 262	1 298	1 427	1 459	1 562	1 609	1 641
	2400, 7'8"	681	740	778	908	1 243	1 293	1 330	1 440	1 505	1 610	1 655	1 691
	2600, 8'5"	1 007	1 070	1 110	1 247	1 279	1 331	1 338	1 480	1 546	1 663	1 712	1 747
	2800, 9'1"	1 026	1 091	1 132	1 276	1 309	1 362	1 371	1 518	1 587	1 710	1 794	1 830
	3000, 9'8"	1 044	1 112	1 154	1 305	1 338	1 363	1 403	1 561	1 633	1 757	1 840	1 880
100, 0'3"	1800, 5'9"	640	694	731	849	1 184	1 233	1 269	1 395	1 455	1 550	1 568	1 601
	2000, 6'5"	659	716	755	879	1 216	1 266	1 304	1 436	1 500	1 571	1 621	1 656
	2200, 7'2"	678	738	778	910	1 247	1 300	1 339	1 478	1 514	1 622	1 673	1 710
	2400, 7'8"	697	760	802	940	1 279	1 334	1 375	1 494	1 564	1 674	1 724	1 765
	2600, 8'5"	1 025	1 091	1 135	1 281	1 317	1 374	1 386	1 538	1 609	1 731	1 785	1 825
	2800, 9'1"	1 044	1 114	1 160	1 312	1 349	1 408	1 421	1 580	1 654	1 783	1 872	1 913
	3000, 9'8"	1 063	1 136	1 184	1 343	1 381	1 412	1 456	1 626	1 704	1 835	1 922	1 968
120, 0'4"	1800, 5'9"	651	707	747	872	1 209	1 261	1 301	1 433	1 498	1 597	1 653	1 690
	2000, 6'5"	668	728	769	901	1 239	1 294	1 335	1 474	1 540	1 651	1 704	1 743
	2200, 7'2"	688	751	795	933	1 273	1 330	1 373	1 518	1 593	1 706	1 761	1 801
	2400, 7'8"	708	774	820	965	1 307	1 366	1 410	1 574	1 647	1 761	1 815	1 860
	2600, 8'5"	1 037	1 107	1 155	1 308	1 347	1 409	1 459	1 620	1 696	1 822	1 881	1 925
	2800, 9'1"	1 057	1 131	1 181	1 341	1 381	1 445	1 497	1 665	1 744	1 878	1 971	2 017
	3000, 9'8"	1 078	1 155	1 206	1 373	1 415	1 487	1 535	1 715	1 797	1 933	2 025	2 076
150, 0'5"	1800, 5'9"	685	728	772	907	1 330	1 388	1 432	1 575	1 644	1 749	1 729	1 772
	2000, 6'5"	708	754	800	942	1 367	1 428	1 474	1 625	1 698	1 734	1 793	1 837
	2200, 7'2"	731	779	827	977	1 404	1 468	1 516	1 675	1 675	1 795	1 856	1 903
	2400, 7'8"	754	804	855	1 013	1 442	1 508	1 558	1 654	1 734	1 857	1 918	1 970
	2600, 8'5"	1 168	1 221	1 274	1 440	1 485	1 554	1 530	1 705	1 789	1 924	1 990	2 041
	2800, 9'1"	1 192	1 247	1 303	1 476	1 523	1 595	1 572	1 756	1 843	1 986	2 087	2 141
	3000, 9'8"	1 215	1 272	1 331	1 511	1 560	1 559	1 614	1 811	1 902	2 047	2 148	2 207

The doors are available in custom sizes.

Please note! The lock is an additional option, not included in door price

- **Insulation:** rigid polyurethane foam. Foam density: up to 50 kg/m³
Thermal conductivity 0,022 W/m*K.
- **Door metal** including the ends is made of 0,5 mm (0,01") thick steel sheet, colored according to RAL catalog.
The doors are wrapped in 50 µm thick film to prevent damage when transporting or mounting.
The door lock come with keys and emergency opener from inside.
- **Sealing of doors along the perimeter** — rubber sealing gasket by European manufacturers.
The doors for freezing chambers are equipped with double profile gasket.



Door code:

SD	Sliding door
L	Low range temperature door
M	Medium range temperature door
R/L	Roll to the right / Roll to the left
Heavy	Heavy handle
Light	Light handle

Example of the door designation: SD 800 2000 100 mm (2'6" 6'5" 0'3") Ral9003/Ral9003 with 80 mm (2'6") with threshc

Door type	Opening width	Opening height	Door leaf thickness	Door metal		Threshold height	Temperature	Roll direction	Handle		
				Inner Side	Outer Side				Inner	Outer	
SD	800, 2'6"	2000, 6'5"	100, 0'3"	RAL9003	RAL9003	80, 0'2"	L	R	Light	Light	
ITEM							Door code	Price			
DOOR FRAME HEATING CABEL FOR LOW TEMPERATURE COLD ROOMS (WITH TEMPERATURE CONDITIONS BELOW 0°C). PRICE FOR RUNNING METER							L	7,14			
METAL CABLE DUCT FOR HEATING CABLE IN RAL COLOR								41,99			
METAL CABLE DUCT FOR HEATING CABLE AISI 304								134,66			
METAL CABLE DUCT FOR HEATING CABLE AISI 430								73,70			
MOUNTING KIT FOR FIXING THE DOOR FRAME TO SANDWICH PANEL WITH OPENING							MFC SD	51,75			
MOUNTING KIT FOR FIXING THE DOOR FRAME TO A BRICK WALL							MFB	7,94			
MOUNTING KIT FOR FIXING THE DOOR FRAME TO A STEEL STUD CONSTRUCTIN							MFS	2,38			
FRAME INSTALLATION HARDWARE FOR STEEL STUD CONSTRUCTION THROUGH INSULATED PANELS								68,89			
DOOR LEAF MADE FROM STAINLESS STEEL (ONE SIDE)							AISI 304	32,94			
PRICE FOR 1 M2 DOOR FRAME							AISI 430	22,62			
DOOR FRAME MADE FROM STAINLESS STEEL							AISI 304	45,56			
PRICE FOR RUNNING METER							AISI 430	26,27			
SETTING THE DOOR FRAME FOR A MONORAIL								59,52			
FERMOD 57 LOCK								271,11			
RAHRBACH LOCK								188,86			
LCS KIDE LOCK								116,74			
PH INSULATION PIN LOCK P4080								66,40			
PH INSULATION PIN LOCK P40100								70,52			
PH INSULATION PIN LOCK P40120								84,48			
PH INSULATION PIN LOCK P40150								84,68			
PH INSULATION PIN LOCK KIT P4080AD								290,75			
PH INSULATION PIN LOCK KIT P40100AD								295,61			
PH INSULATION PIN LOCK KIT P40120AD								312,08			
PH INSULATION PIN LOCK KIT P40150AD								312,30			
PH INSULATION AUTOMATIC DRIVE								2 014,36			
AUTOMATIC DRIVE EQUIPPED WITH SAFETY SENSORS								367,98			
CORD SWITCHES								189,97			
PH INSULATION AUTOMATIC DRIVE KIT TO INSULATED SANDWICH PANELS								12,26			
PH INSULATION AUTOMATIC DRIVE KIT TO A BRICK WALL								2,94			
PH INSULATION AUTOMATIC DRIVE KIT FOR STEEL STUD CONSTRUCTION								1,15			
HEAVY/HEAVY HANDLE FOR STANDARD DOORS								152,78			
PRESSURE EQUALIZATION VALVE								15,01			
VIEWING WINDOW. SINGLE-GAZED. PLASTIC 400x400 mm, 1'3"x1'3"								43,54			
VIEWING WINDOW. SINGLE-GAZED. PLASTIC 400x600 mm, 1'3"x1'9"								46,69			
LIGHT THRESHOLD RAL, PRICE FOR RUNNING METER								32,54			
LIGHT THRESHOLD RAL, PRICE FOR RUNNING METER								51,27			
LIGHT THRESHOLD AISI 430. PRICE FOR RUNNING METER								38,02			
INSULATED THRESHOLD AISI 304. PRICE FOR RUNNING METER								92,38			
INSULATED THRESHOLD AISI 430. PRICE FOR RUNNING METER								59,76			
STAINLESS STEEL METALWARE KIT, PRICE FOR 1 SQ. M								2,78			
HIDDEN FASTENING								36,11			
HIDDEN FASTENING FOR FRAME AISI 304								59,21			
HIDDEN FASTENING FOR FRAME AISI 430								48,57			

Door bumpers

Type of material	Thickness mm, in	Price for m ²	Price for r/m	
			0,25 m, 0,8'	0,5 m, 1'6"
AISI 304	1,5 (0,05")	109,97	27	55
AISI 430	1,5 (0,05")	72,90	18	36
Checkered plate	1,5 (0,05")	50,16	13	25
LDPE plastic	4 (0,1")	32,81	8	16

Packaging

Item	Price
Stretch-wrap	Included in door price
Cardboard packaging	Calculated individually for your order
Wooden packaging	Calculated individually for your order


Fixed Ramp for Sliding Doors

		Door ramp width, mm, ft													
		1200, 3'9"	1300, 4'2"	1400, 4'5"	1500, 4'9"	1600, 5'2"	1700, 5'5"	1800, 5'9"	1900, 6'2"	2000, 6'5"	2100, 6'8"	2200, 7'2"	2300, 7'5"	2400, 7'8"	2500, 8'2"
Door ramp height	50, 1,9'	178	190	198	206	221	228	236	244	256	267	274	287	294	302
	50, 2,3'	180	193	201	209	224	232	239	247	260	270	278	291	298	306
	50, 3,1'	185	199	206	214	231	238	246	254	267	278	286	299	307	315
	100, 3,9'	190	204	212	220	237	245	253	260	275	285	293	308	316	323
	20, 4,7'	195	210	218	226	244	251	259	267	282	293	301	316	324	332
	50, 5,9'	202	218	226	234	253	261	269	277	294	304	312	329	337	345
	100, 7,8'	214	232	240	248	270	278	286	294	312	323	332	350	358	366

Portable Ramp for Sliding Doors

		Door ramp width, mm, ft													
		1200, 3'9"	1300, 4'2"	1400, 4'5"	1500, 4'9"	1600, 5'2"	1700, 5'5"	1800, 5'9"	1900, 6'2"	2000, 6'5"	2100, 6'8"	2200, 7'2"	2300, 7'5"	2400, 7'8"	2500, 8'2"
Door ramp height	50, 1,9'	143	150	158	165	177	185	192	205	212	220	227	239	247	254
	50, 2,3'	145	152	160	167	180	188	195	208	215	223	231	243	251	258
	50, 3,1'	149	157	165	172	186	193	201	214	222	230	237	251	258	266
	100, 3,9'	154	162	169	177	191	199	207	221	229	236	244	258	266	274
	20, 4,7'	158	166	174	182	197	205	212	227	235	243	251	266	273	281
	50, 5,9'	165	173	181	189	205	213	221	237	245	253	261	277	285	293
	100, 7,8'	177	185	193	201	219	227	235	253	261	269	277	296	304	312

Ramp standard depth: 1000 mm, 3'2"
Ramp base: 2 mm, 0,07" thick painted steel

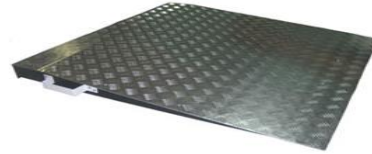

Cover

Metal	Opening width, mm, ft											
	800, 2'6"	1000, 3'2"	1200, 3'9"	1400, 4'5"	1600, 5'2"	1800, 5'9"	2000, 6'5"	2200, 7'2"	2400, 7'8"	2600, 8'5"	2800, 9'1"	3000, 9'8"
RAL	47,44	49,97	52,51	55,21	57,67	60,12	62,57	65,02	67,48	69,93	72,82	75,24
AISI 304	71,25	78,18	85,13	92,15	98,70	105,25	111,80	118,35	124,90	131,45	139,32	145,72
AISI 430	62,38	67,59	72,79	76,93	81,74	86,55	91,37	96,17	100,98	105,80	110,76	115,44

Cover for Sliding Doors with Automatic Drive

Metal	Opening width, mm, ft											
	800, 2'6"	1000, 3'2"	1200, 3'9"	1400, 4'5"	1600, 5'2"	1800, 5'9"	2000, 6'5"	2200, 7'2"	2400, 7'8"	2600, 8'5"	2800, 9'1"	3000, 9'8"
RAL	47,96	51,67	55,90	59,53	63,16	66,79	70,43	74,05	77,69	81,32	85,77	89,37
AISI 304	87,14	97,13	108,58	118,21	127,83	137,44	147,06	156,68	166,30	175,92	188,38	197,85
AISI 430	70,46	77,85	85,21	92,21	99,23	106,24	113,25	120,27	127,28	134,29	142,46	149,33



141100, Agrohimi territory, bld. 58,
Schelkovo, Moscow region, Russia

+7 (495) 240-83-14

www.profhhold.com